



1º Passo, vamos instalar o 3CX.




Esta é a tela inicial do instalador, clique em Next

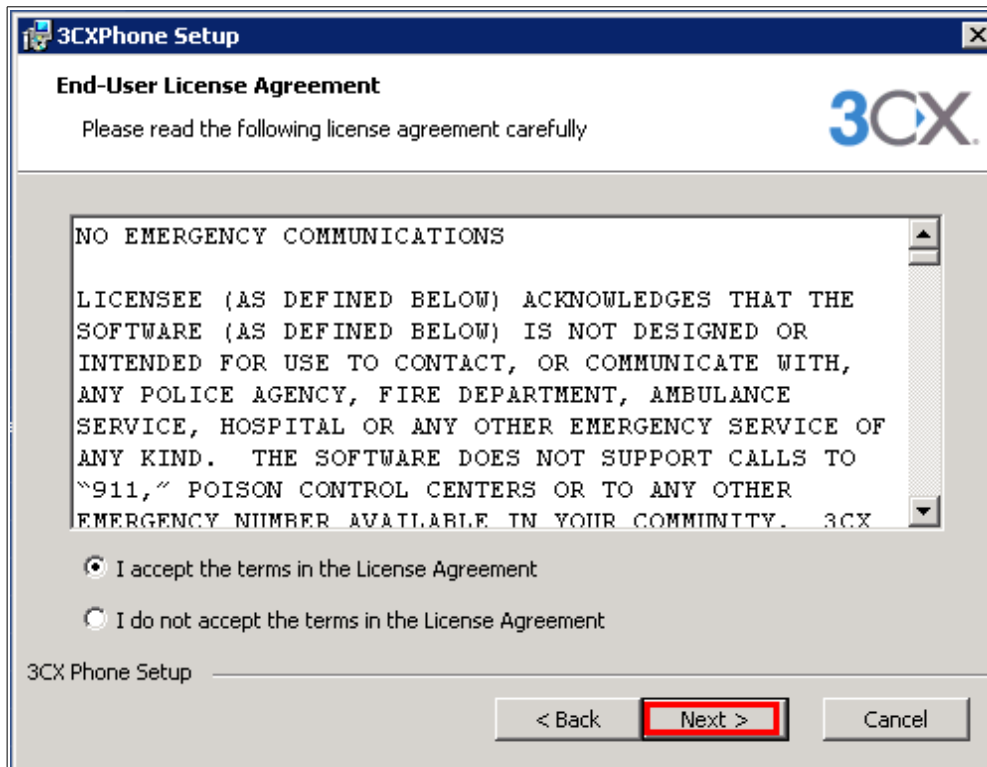

Selecione a opção como na imagem acima e clique novamente em Next

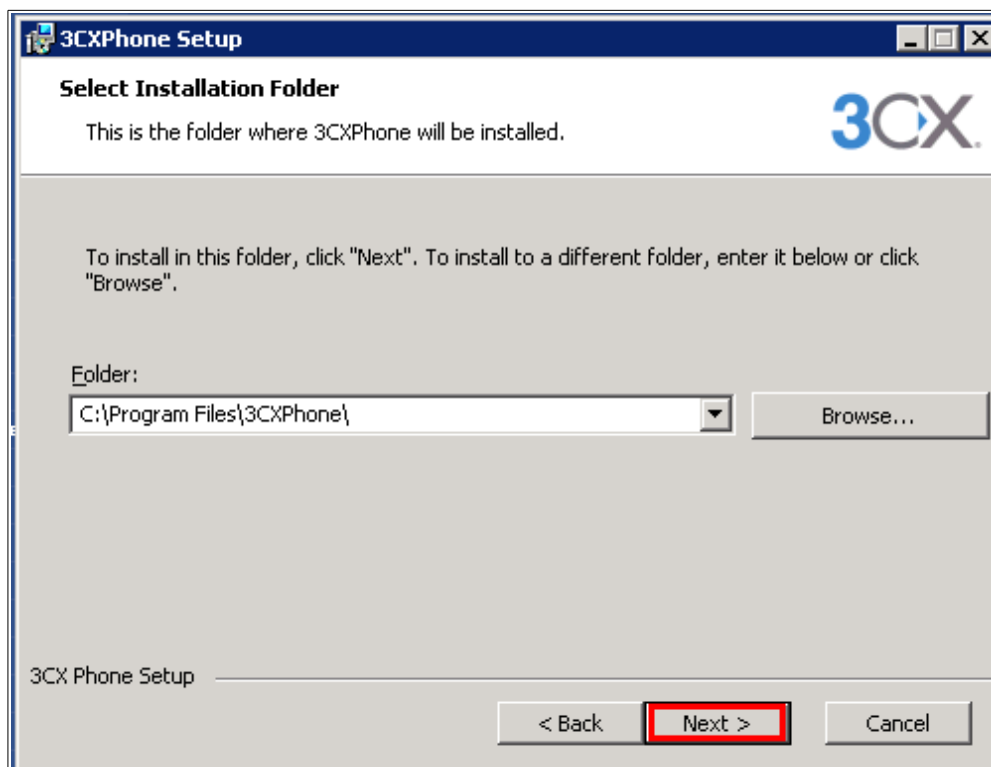

Clique novamente em Next

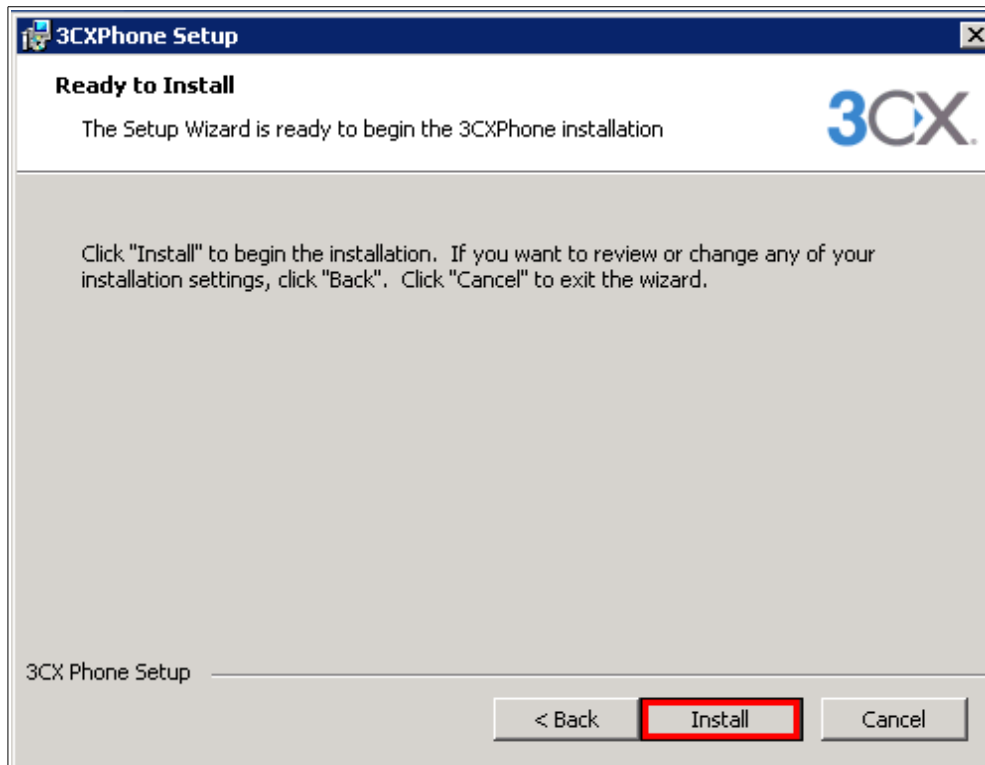

Clique agora em Install




Clique agora em Finish.



Após clicar no botão Finish esta tela irá aparecer, você clicará em Create Profile, que será o nosso próximo passo.

2º Passo, criar uma conta no 3CX.

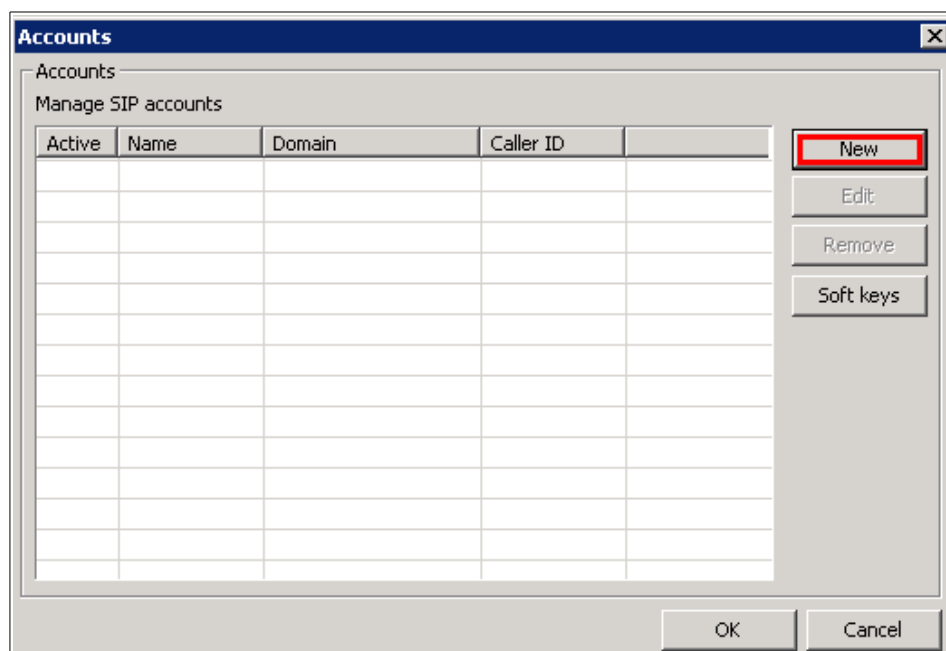

Clique em New.

3º Passo, configurar uma conta no 3CX.

Agora entre com os dados.

Account name : Nome da conta


Caller ID: Nome do usuário do telefone

Extension: Usuário

ID: Usuário novamente

Password: Senha

I am in the office: IP do PBX

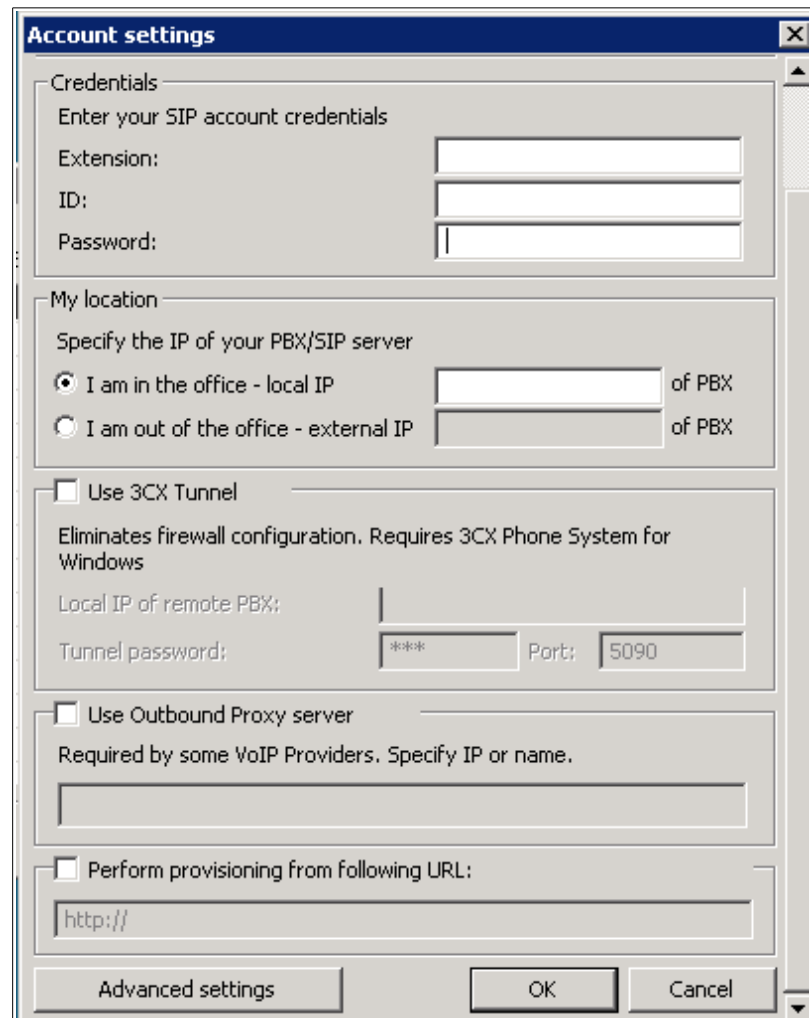


The screenshot shows the 'Account settings' dialog box with the following sections and fields:

- Credentials**: Enter your SIP account credentials. Fields for Extension, ID, and Password.
- My location**: Specify the IP of your PBX/SIP server. Radio buttons for 'I am in the office - local IP' (selected) and 'I am out of the office - external IP'. Each has an IP input field followed by 'of PBX'.
- Use 3CX Tunnel**: Unchecked checkbox. Description: 'Eliminates firewall configuration. Requires 3CX Phone System for Windows'. Fields for 'Local IP of remote PBX:', 'Tunnel password:' (masked with ****), and 'Port:' (5090).
- Use Outbound Proxy server**: Unchecked checkbox. Description: 'Required by some VoIP Providers. Specify IP or name.' with an empty input field.
- Perform provisioning from following URL:** Unchecked checkbox. Input field containing 'http://'.

Buttons at the bottom: 'Advanced settings', 'OK', and 'Cancel'.

Exemplo de configurações já preenchidas

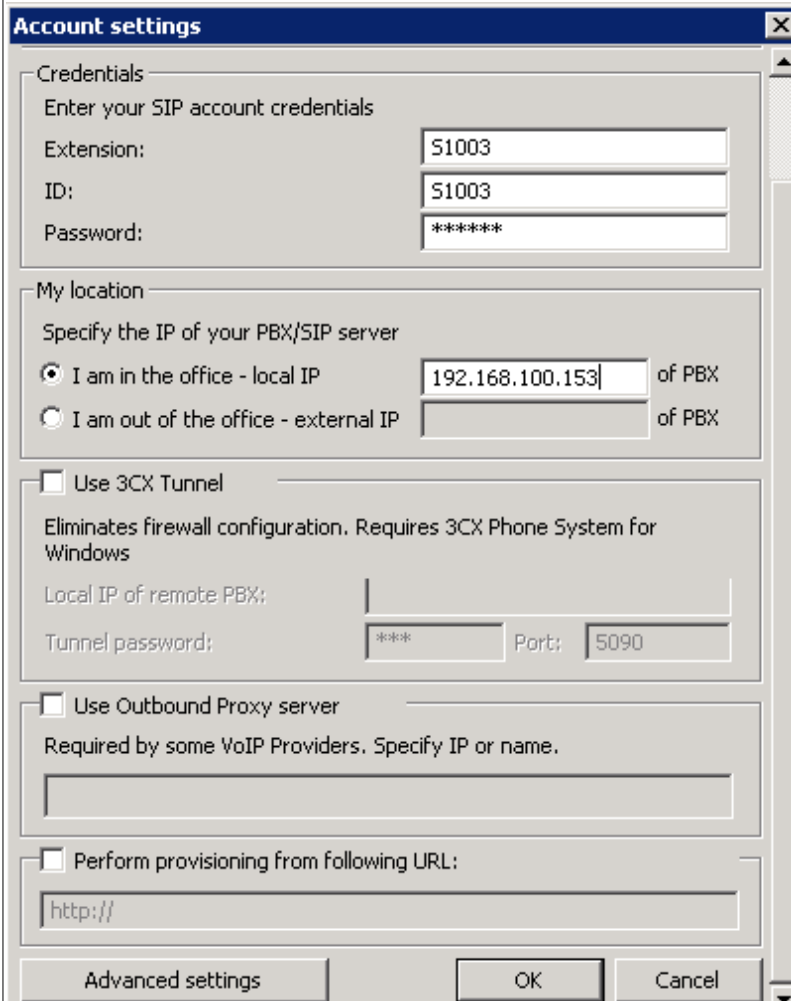

The image shows a screenshot of a software dialog box titled "Account settings". The dialog is divided into several sections with expandable/collapsible headers. The "Credentials" section is expanded, showing fields for "Extension:" (S1003), "ID:" (S1003), and "Password:" (*****). The "My location" section is also expanded, with the radio button "I am in the office - local IP" selected and the IP address "192.168.100.153" entered. The "Use 3CX Tunnel" section is collapsed. The "Use Outbound Proxy server" section is collapsed. The "Perform provisioning from following URL:" section is collapsed, with "http://" visible in the text box. At the bottom, there are three buttons: "Advanced settings", "OK", and "Cancel".

Account settings

Credentials
Enter your SIP account credentials

Extension: S1003

ID: S1003

Password: *****

My location
Specify the IP of your PBX/SIP server

I am in the office - local IP 192.168.100.153 of PBX

I am out of the office - external IP of PBX

Use 3CX Tunnel
Eliminates firewall configuration. Requires 3CX Phone System for Windows

Local IP of remote PBX:


Tunnel password: *** Port: 5090

Use Outbound Proxy server
Required by some VoIP Providers. Specify IP or name.

Perform provisioning from following URL:
http://

Advanced settings OK Cancel

4º Passo, configuração de codecs.

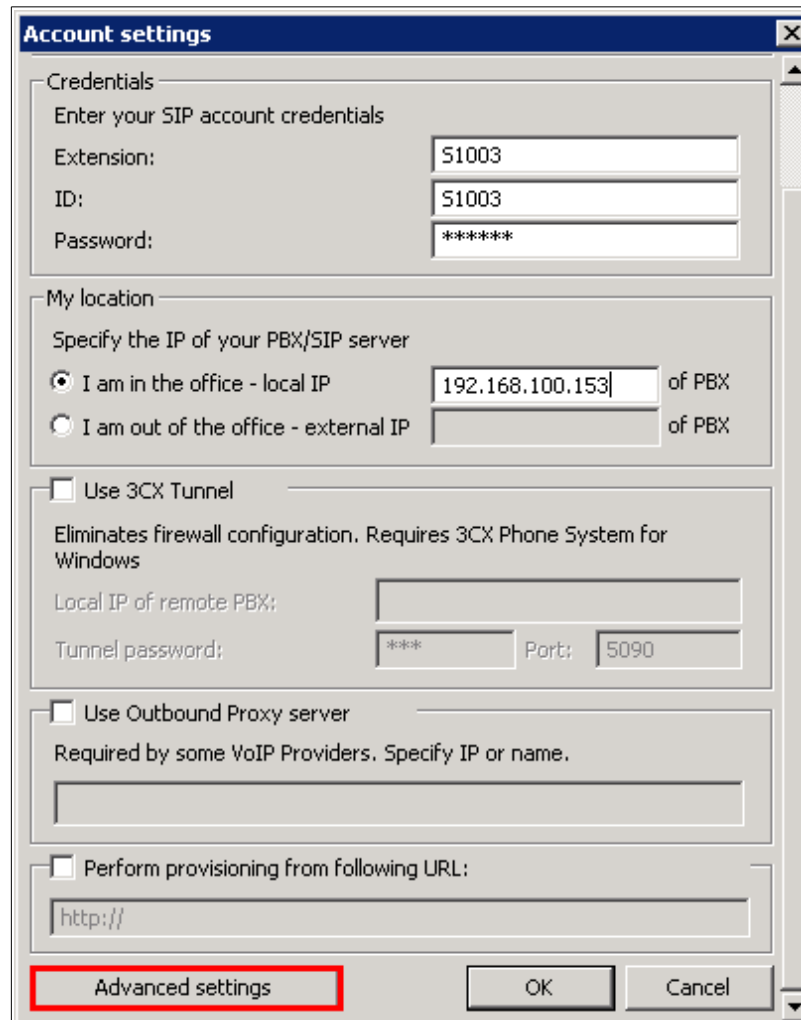

The image shows a Windows-style dialog box titled "Account settings". It contains several sections for configuring SIP account credentials and location. The "Advanced settings" button at the bottom left is highlighted with a red rectangle.

Account settings

Credentials
Enter your SIP account credentials

Extension: 51003
ID: 51003
Password: *****

My location
Specify the IP of your PBX/SIP server

I am in the office - local IP 192.168.100.153 of PBX
 I am out of the office - external IP of PBX

Use 3CX Tunnel
Eliminates firewall configuration. Requires 3CX Phone System for Windows


Local IP of remote PBX:
Tunnel password: *** Port: 5090

Use Outbound Proxy server
Required by some VoIP Providers. Specify IP or name.


Perform provisioning from following URL:
http://

Advanced settings OK Cancel

Clique em Advanced settings

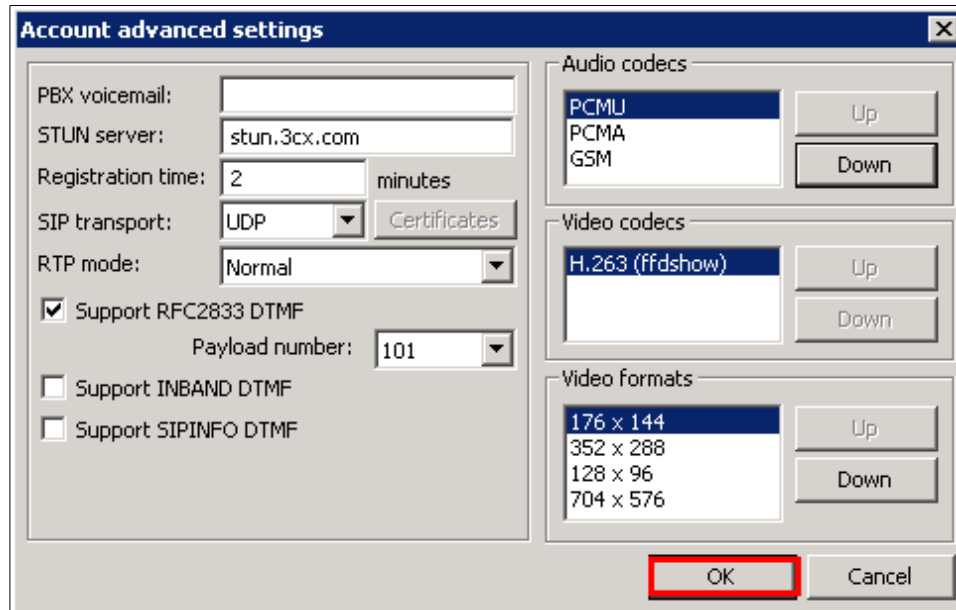


Confira se as suas configurações batem com as da tela acima e clique em OK

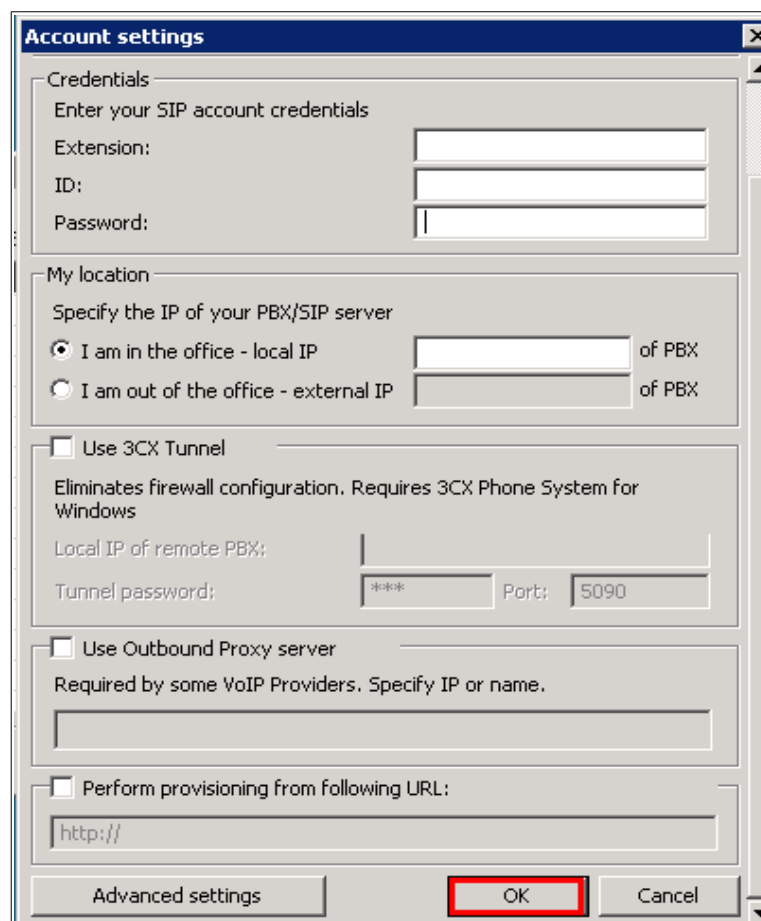

Clique novamente em OK

5º Passo , confirmando o uso da conta.

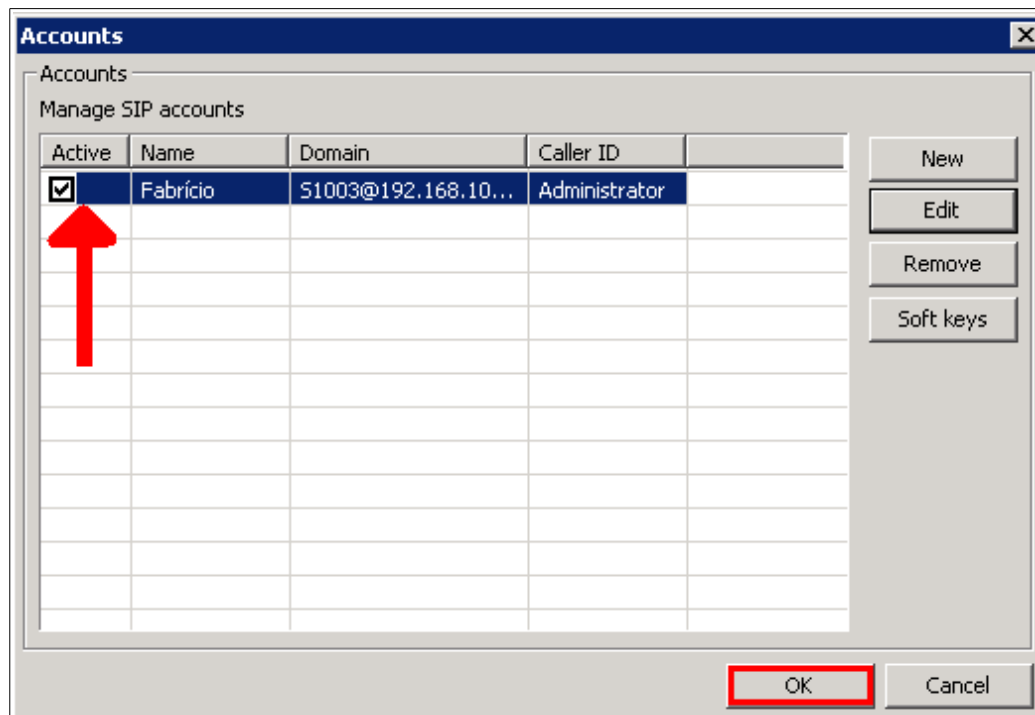


Verifique se a conta está ativa e clique em OK

Pronto, Agora é só realizar chamadas do seu softphone...

Lembrete:

Se for autenticar externamente ao PABX, ative a opção **I am out of the office** no terceiro passo.

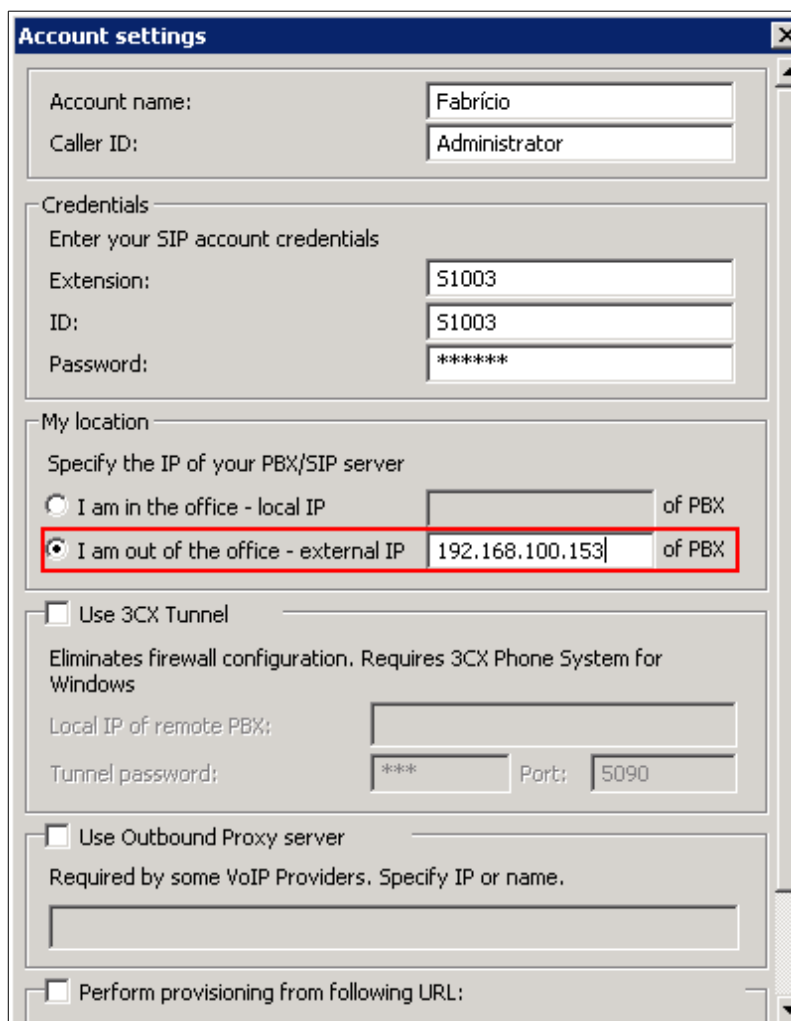

Account settings

Account name:
Caller ID:

Credentials
Enter your SIP account credentials
Extension:
ID:
Password:

My location
Specify the IP of your PBX/SIP server
 I am in the office - local IP of PBX
 I am out of the office - external IP of PBX

Use 3CX Tunnel
Eliminates firewall configuration. Requires 3CX Phone System for Windows
Local IP of remote PBX:
Tunnel password: Port:

Use Outbound Proxy server
Required by some VoIP Providers. Specify IP or name.

Perform provisioning from following URL: